

LGMA

LGMA LM930 FRONT END LOADER

Proudly Distributed By **MCM**



SCAN FOR MORE INFO



@mcm.company



MCM Group





www.MCMGROUP.co.za

TECHNICAL SPECIFICATIONS

LGMA LM930 FRONT END LOADER

Proudly Distributed By MCM

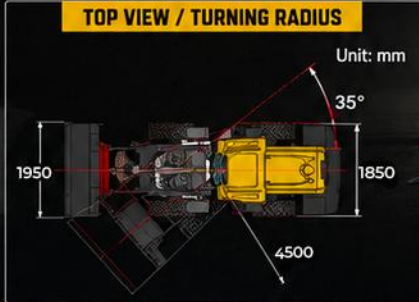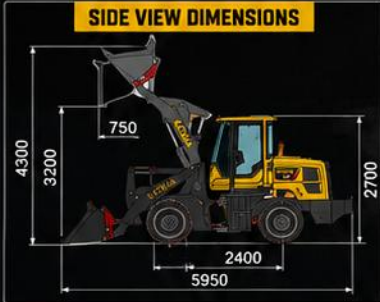

1 MAIN SPECIFICATIONS / TECHNICAL PARAMETERS

Rated load	1600kg
Operating weight	4000kg (Filling counterweight)
Bucket capacity	0.8m ³
Bucket width × bucket depth	1900mm × 500mm
Overall dimension (L × W × H)	5950mm × 1830mm × 2700mm
Wheel base	2340mm
Wheel track	1500mm
Max. dumping height	3200mm
Max. dumping distance	850mm
Turning radius	5000mm
Min. ground clearance	300mm

2 ENGINE

Standard engine	Yunnei YN27GBZ (58KW)
-----------------	-----------------------

3 BRAKE SYSTEM

Operating type	Mechanical single joystick
① Single hydraulic joystick	
② Electrical hydraulic joystick	
Brake booster pump	Two-way air brake

7 WHOLE CAR COVERING PARTS

Color	Customization
Stamped and stretched front hood	Yes
Stamped and stretched rear hood	Yes, Side flip type (T type)
Stamped and stretched counterweight	Yes
Quick-hitch	Optional
Seat	Luxury Seat
Dashboard	LCD Dashboard
Dashboard (Optional)	Adjustable LCD
Air conditioner (Optional)	① Cold A/C ② Heating and cooling A/C
Battery	24V, 60A
Reversing camera	Optional, Customizable start-up screen
Warning lights	Standard
Reverse horn	Standard
Timer	Standard
Radios	Standard
Tool box	Export-specific toolbox

4 TRANSMISSION SYSTEM

Type	265 Integral H/L Speed
Pattern	Automatic, Mechanical gear change
Pattern (Options)	Automatic, Electronically gear change
Radiator	Large hole double row
Auxiliary water tank	Standard
Prefilter	Dual air filter

5 HYDRAULIC SYSTEM

Lifting time	4S
Falling time	3S
Total cycling time	10S
Working pump	1040 Left-hand Spline key
Walking pump	316 Left-hand Spline key
Steering gears	200A
Distributor	15.2, 40L/min
Priority valve	200
Pump and valve integrated	No
Oil pipe	24° Tapered
Fuel tank	New style fuel tank

6 DRIVE AXLES

Axle	LG Small Wheel Hub Reduction Cast Steel Disc Brake Axle
Articulated	Double layer

8 TYRE

Tyre (Standard)	20.5 / 70-16
-----------------	--------------

9 GRAIN BUCKET

Unloading height	Bucket width	Depth	Capacity
3500mm	1900mm	700mm	1.6m ³
3800mm	1900mm	700mm	1.6m ³
4500mm	1900mm	800mm	1.7m ³



www.MCMGROUP.co.za

CAPE TOWN

9 Karee Rd, Kraaifontein Industria,
Cape Town, 7570

SALES (+27) 21 001 8686

ruan@mcmco.co.za

GEORGE

Jura Lands, Beach Road,
Hansmoeskraal, George, 6529

SALES (+27) 44 878 2917

chris@mcmco.co.za

FREE STATE

Bloem Showgrounds, Curie Avenue,
Generaal De Wet, Bloemfontein, 9301

SALES (+27) 84 022 7300

clarence@mcmco.co.za

GAUTENG

26 Sterling Rd, Unit 1,
Samrand Business Park, Midrand, 0117

SALES (+27) 12 030 3451

sales@mcmco.co.za