



# **SORTING GRAPPLE** **MB-G600 S4**

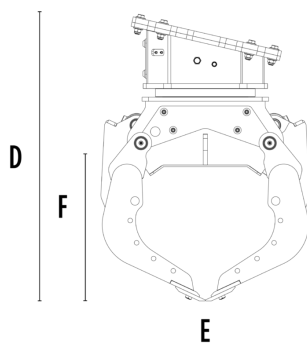

## SPECIFICATIONS

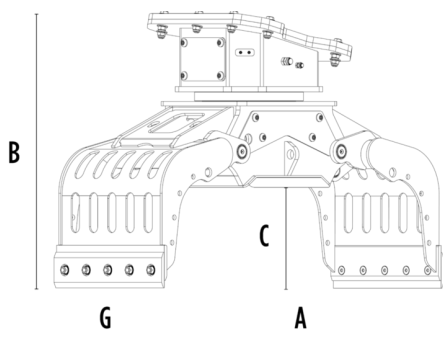

Recommended excavator	ton	7 - 12
Weight	ton	0,63
Capacity (claws closed)	m³	0,24
Rotation	Degree	360°
Oil pressure (rotation)	bar	160 - 200
Oil flow rate (rotation)	l/min	25 - 35
Oil pressure (opening - closing)	bar	250 - 300
Oil flow rate (opening - closing)	l/min	50 - 60
Size A	mm	1705
Size B	mm	1145
Size C	mm	470
Size D	mm	1300
Size E	mm	975
Size F	mm	625
Size G	mm	650

## OPTIONAL ACCESSORIES

Multi-purpose blade kit	Clam shell kit
Serrated side plate kit	Grip improvement kit
Rubber protection kit	Serrated side profile kit
Rotation power extender kit	12 V Electrical Kit (for 2 hose functionality)
Remote power control system	24 Month Warranty

## APPLICATION AREAS



## Demolitions



Road works



Quarry



Mines



## Tunnels



## Enclosed spaces



## Pipelines



Urban construction sites



Maintaining landscape  
and agricultural areas



Forest maintenance