



SHAFTS SCREENER MB-HDS207



SPECIFICATIONS

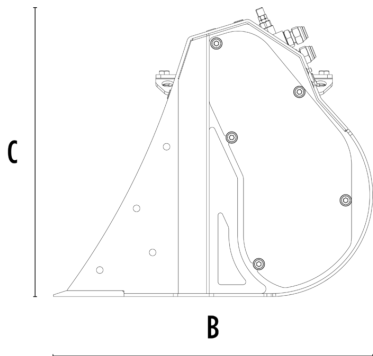


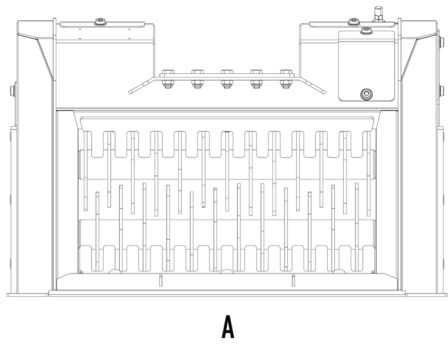

Recommended excavator	ton	1,3 - 2,8
Recommended backhoe loader	ton	3 - 4*
Weight	ton	0,098
Load capacity	m³	0.05
Pressure	bar	200 - 220
Back pressure	bar	< 20
Oil flow rate**	l/min	25 - 35
Size A	mm	740
Size B	mm	545
Size C	mm	495



* Only compatible with the posterior boom of a Backhoe.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Sifting damp/dry soil
 RQ15 Sifting kit	15 mm	Soil Aeration
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction

* Shafts in closed position.

OPTIONAL ACCESSORIES

Load capacity increase kit	Shaft holder
24 Month Warranty	

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Inert material
recycling



Excavations



Urban construction
sites



Foundries



Maintaining landscape
and agricultural areas