



SHAFTS SCREENER
MB-HDS220



SPECIFICATIONS

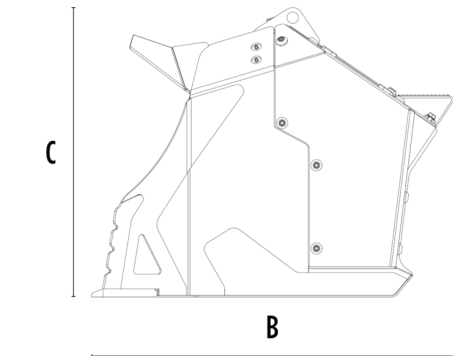


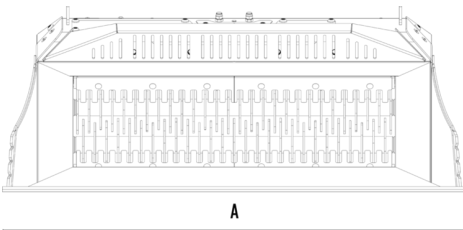


Recommended backhoe loader	ton	7 - 11*
Recommended skid steer loader**	ton	4,5 - 10
Weight	ton	1
Load capacity	m³	0.6
Pressure	bar	230 - 280
Back pressure	bar	< 20
Oil flow rate***	l/min	90 - 150
Size A	mm	2220
Size B	mm	1060
Size C	mm	890



* Only compatible with the posterior boom of a Backhoe.
** Please verify machine's Rated Operating Capacity.
*** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Sifting damp/dry soil
 RQ20 Sifting kit	20 mm	Soil Aeration
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
--------------	-------------------

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Inert material
recycling



Excavations



Urban construction
sites



Foundries



Maintaining landscape
and agricultural areas