





SHAFTS SCREENER
MB-HDS314



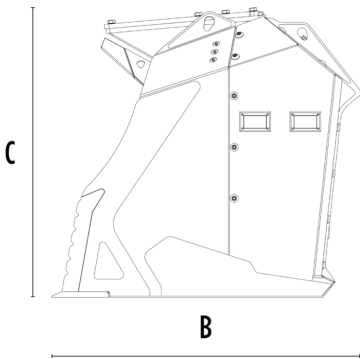

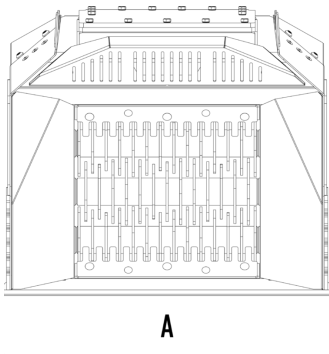




SPECIFICATIONS

	Recommended excavator	ton	13 - 20
	Recommended loader*	ton	9 - 14
	Weight	ton	1,4
	Load capacity	m³	0.9
	Pressure	bar	230 - 280
	Back pressure	bar	< 20
	Oil flow rate**	l/min	100 - 160
	Size A	mm	1430
	Size B	mm	1350
	Size C	mm	1250

* Please verify machine's Rated Operating Capacity.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT


KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Sifting damp/dry soil Soil Aeration
 RQ20 Sifting kit	20 mm	
 RQ50 Sifting kit	50 mm	
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil
 RE16 Fine sifting kit	16 mm	
 RC Compost kit	36.5 mm	Shredding foliage and small branches Composting


* Shafts in closed position.


OPTIONAL ACCESSORIES


Shaft holder	24 Month Warranty
--------------	-------------------


APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines


Inert material recycling


Excavations


Urban construction sites


Foundries


Maintaining landscape and agricultural areas