



SHAFTS SCREENER  
MB-HDS412



A

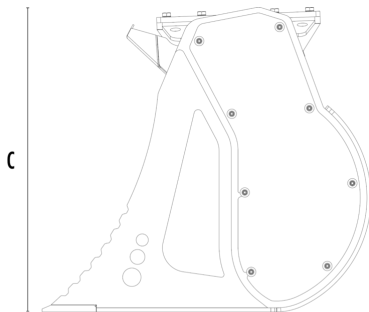

B










SPECIFICATIONS



|                       |       |           |
|-----------------------|-------|-----------|
| Recommended excavator | ton   | 10 - 14   |
| Weight                | ton   | 1,2       |
| Load capacity         | m³    | 0,55      |
| Pressure              | bar   | 230 - 280 |
| Back pressure         | bar   | < 20      |
| Oil flow rate*        | l/min | 90 - 150  |
| Size A                | mm    | 1250      |
| Size B                | mm    | 1220      |
| Size C                | mm    | 1110      |

\* The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

| KIT   | ADJUSTMENT* | APPLICATION   |
|---|-------------|---|
|  RQ8 Sifting kit         | 8 mm        | Sifting damp/dry soil<br>Soil Aeration  |
|  RQ20 Sifting kit        | 20 mm       |   |
|  RQ50 Sifting kit        | 50 mm       |   |
|  RM Mixer kit            |             | Coal reduction<br>Soil Aeration<br>Compost Aeration<br>Glass reduction<br>Drywall reduction |
|  RE8 Fine sifting kit  | 8.5 mm      | Sifting damp/dry soil   |
|  RE16 Fine sifting kit | 16 mm       |   |
|  RC Compost kit        | 36.5 mm     | Shredding foliage and small branches<br>Composting  |

\* Shafts in closed position.

OPTIONAL ACCESSORIES

|              |                   |
|--------------|-------------------|
| Shaft holder | 24 Month Warranty |
|--------------|-------------------|

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Inert material  
recycling



Excavations



Urban construction  
sites



Foundries



Maintaining landscape  
and agricultural areas