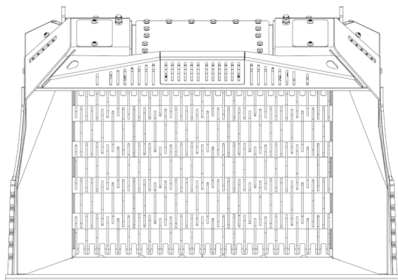



SHAFTS SCREENER  
MB-HDS523



A



B










SPECIFICATIONS



Recommended excavator	ton	30 - 45
Weight	ton	3,35
Load capacity	m³	2.00*
Load capacity with coal capacity increase kit	m³	2.40 - 3.50*
Pressure	bar	250 - 300
Back pressure	bar	< 20
Oil flow rate**	l/min	230 - 250
Size A	mm	2330
Size B	mm	1500
Size C	mm	1620

\* The value of the load capacity varies according to the type of material being processed.  
\*\* The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Sifting damp/dry soil Soil Aeration
 RQ20 Sifting kit	20 mm	
 RQ50 Sifting kit	50 mm	
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil
 RE16 Fine sifting kit	16 mm	
 RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

\* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
--------------	-------------------

APPLICATION AREAS



Quarry



Mines



Pipelines



Inert material  
recycling



Excavations



Foundries



Maintaining landscape  
and agricultural areas