




SHAFTS SCREENER

MB-HDS533

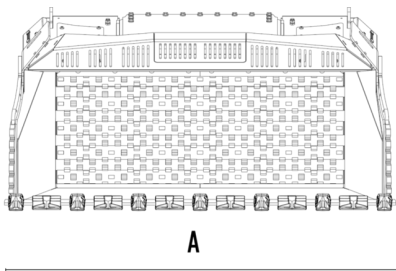

SPECIFICATIONS

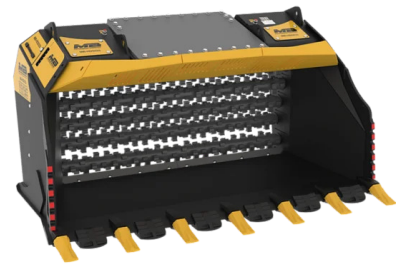

Recommended excavator	ton	50 - 80
-----------------------	-----	---------



Recommended loader*	ton	30 - 50
---------------------	-----	---------

Weight	ton	6,6
--------	-----	-----

Load capacity	m³	3.80
---------------	----	------

Pressure	bar	250 - 300
----------	-----	-----------

Back pressure	bar	< 20
---------------	-----	------

Oil flow rate**	l/min	230 - 250
-----------------	-------	-----------


Size A	mm	3400
--------	----	------

Size B	mm	2130
--------	----	------

Size C	mm	1770
--------	----	------

\* Please verify machine's Rated Operating Capacity.  
\*\* The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	APPLICATION
 RM Mixer kit	Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
Hour meter	

APPLICATION AREAS



Quarry



Mines



Pipelines



Inert material  
recycling



Excavations



Foundries



Maintaining landscape  
and agricultural areas