


SCREENING BUCKET

MB-LS170 S2



SPECIFICATIONS

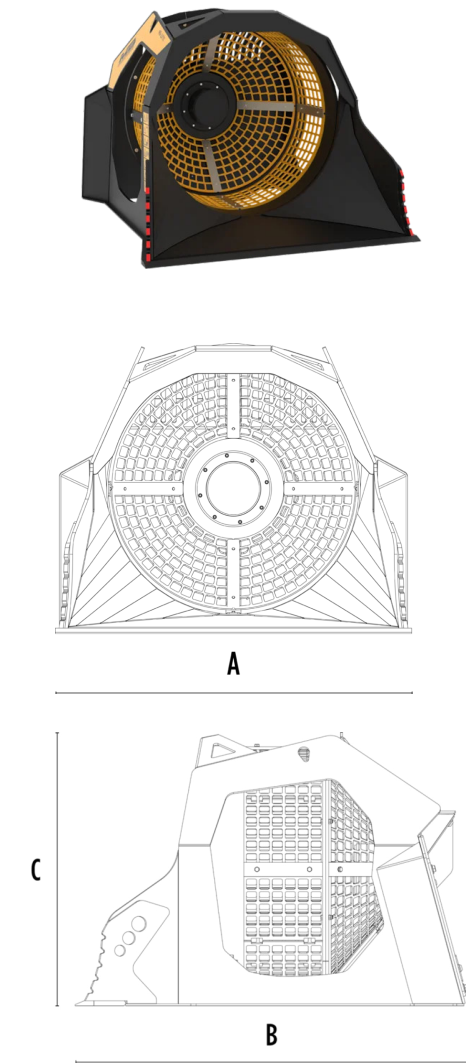

Recommended backhoe loader	ton	8 - 15
Recommended loader*	ton	8 - 15
Weight	ton	1,45
Load capacity	m³	1.1
Pressure	bar	160 - 200
Back pressure	bar	< 20
Oil flow rate**	l/min	80 - 100
Basket diameter	mm	1200
Basket depth	mm	900
Size A	mm	1670
Size B	mm	1930
Size C	mm	1360

* Please verify machine's Rated Operating Capacity.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Hour meter	24 Month Warranty
------------	-------------------

APPLICATION AREAS

Road works

Quarry

Mines

Tunnels

Enclosed spaces

Inert material recycling

Urban construction sites

Maintaining landscape and agricultural areas