

SCREENING BUCKET

MB-LS220 S2



SPECIFICATIONS



Recommended loader*	ton	15 - 25
Weight	ton	2,8
Load capacity	m³	2.4
Pressure	bar	200 - 250
Back pressure	bar	< 20
Oil flow rate**	l/min	120 - 140
Basket diameter	mm	1600
Basket depth	mm	1225
Size A	mm	2180
Size B	mm	2355
Size C	mm	1790

\* Please verify machine's Rated Operating Capacity.  
\*\* The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Hour meter	24 Month Warranty
------------	-------------------

APPLICATION AREAS

Road works

Quarry


Mines

Tunnels


Enclosed spaces

Inert material recycling

Maintaining landscape and agricultural areas

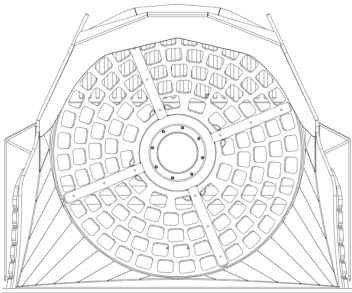

A

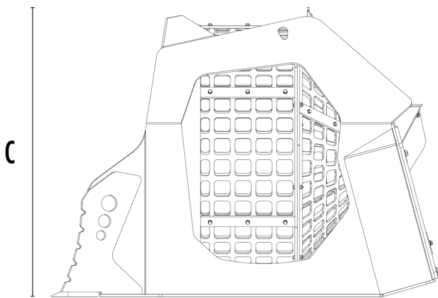

B

