




DRUM CUTTER
MB-R500

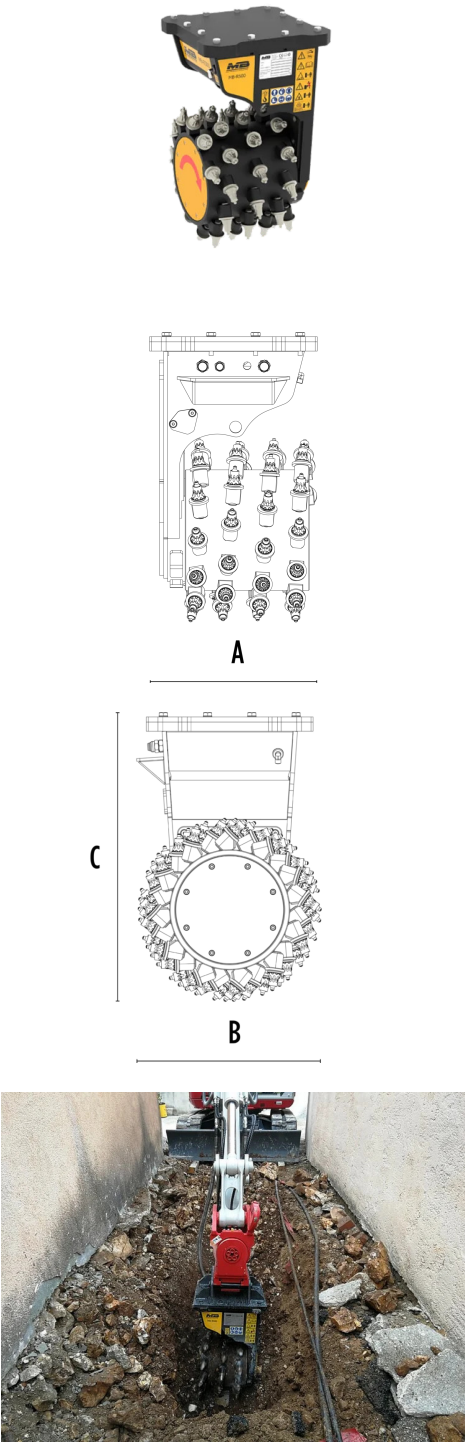

SPECIFICATIONS

	Recommended excavator	ton	3,5 - 11
	Recommended skid steer loader*	ton	3,5 - 6
	Weight	ton	0,3
	Pressure	bar	300 - 350
	Back pressure	bar	< 4
	Oil flow rate**	l/min	60 - 120
	Cutting width	mm	450
	Speed/Min. (minimum - maximum)	rpm	80 - 120
	Output torque	Nm	5000
	Drum diameter	mm	500
	Pick force FI	ton	19600
	Size A	mm	500
	Size B	mm	500
	Size C	mm	820

* Please verify machine's Rated Operating Capacity.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Dust suppression kit	Interchangeable drum kit (low-set / full-set)
Rock and asphalt picks kit	Drum cover kit
Cutting depth adjustment kit	Cutter body rotation kit
Power transmission kit	24 Month Warranty

APPLICATION AREAS



Demolitions



Road works



Quarry



Mines



Tunnels



Enclosed spaces



Pipelines



Excavations



Urban construction sites



Maintaining landscape and agricultural areas



Underwater works



Profiling