



SCREENING BUCKET  
MB-S14 S4



A

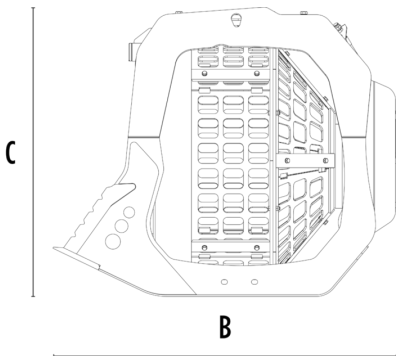

B



SPECIFICATIONS



Recommended excavator	ton	9 - 20
Weight	ton	1,1
Load capacity	m³	1.1
Pressure	bar	150 - 200
Back pressure	bar	< 20
Oil flow rate*	l/min	60 - 80
Basket diameter	mm	1200
Basket depth	mm	900
Size A	mm	1400
Size B	mm	1700
Size C	mm	1440

\* The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Dust suppression kit	Hour meter
Basket protection kit	24 Month Warranty

APPLICATION AREAS



Demolitions



Road works



Quarry



Mines



Tunnels



Enclosed spaces



Pipelines



Inert material  
recycling



Excavations



Urban construction  
sites



Foundries



Maintaining landscape  
and agricultural areas



Forest maintenance