



U18





Machine Weight: (Rubber track / Steel track) 1800/1880 kg

Bucket capacity: 0.05 m

Engine power: 14.5/2400 / 15.2/2500 kW/rpm

- Optional Euro V / Tier4 engine (Yanmar engine)
- Telescopic chassis, Solid and reliable
- Low fuel consumption
- Swiftly detachable canopy
- Operation in utmost comfort
- Easy maintenance
- Standard with Rubber Tracks

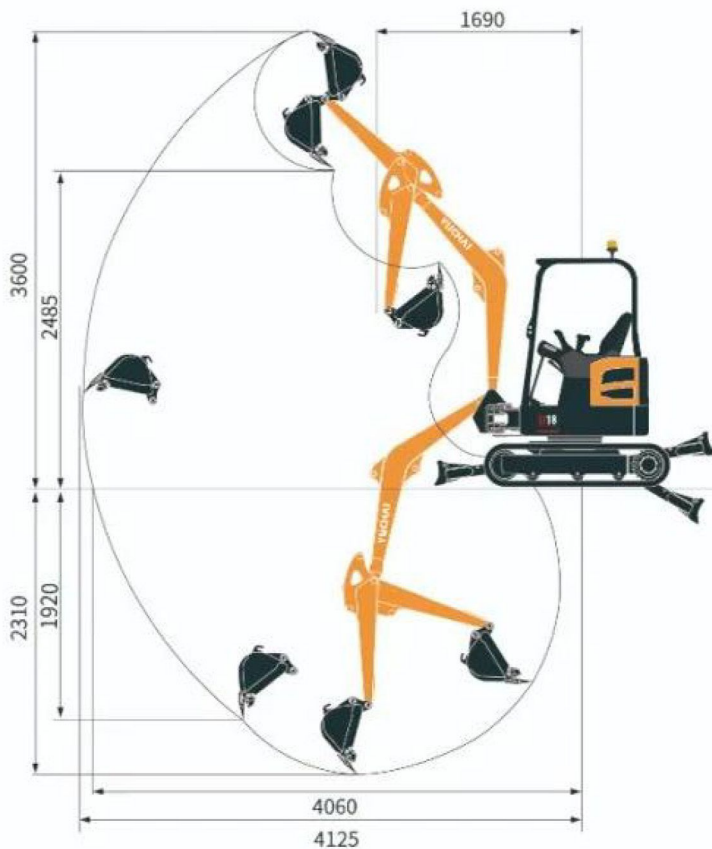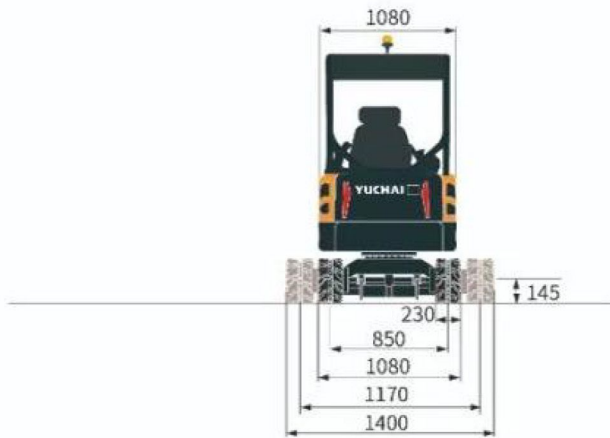

► Technical Specification

Basic parameter

Machine weight	1800/1880 kg
Bucket capacity	0.05 m ³
Width of bucket	450 mm

Performance parameter

Engine model	Yanmar 3TNV76/ 3TNV80F
Engine power	14.5/2400 / 15.2/2500 kW/rpm
Max. Gradeability	30 °
Max. digging force of arm	8.5 kN
Max. digging force of bucket	15.5 kN
Traveling speed	2/4 km/h
Max. hauling force	22 kN
Slewing speed of platform	8.5~10.5 rpm

Operating parameter

Max. digging height	3600 mm
Max. digging depth	2310 mm
Max. digging radius	4125 mm
Max. digging radius on ground level	4060 mm
Max. dumping height	2485 mm
Min. slewing radius	1690 mm
Max. vertical digging depth	1920 mm

Transportation dimension

Overall length	3730 mm
Overall width	1080 mm
Overall height	2335/2345 mm

Other Parameter

Width of undercarriage	1080~1400 mm
Length of track	1600 mm
Width of track	230 mm
Height between undercarriage and ground	145 mm
Height between platform and ground	450 mm
Platform tail turning radius	700 mm
Length to center of rollers	1230 mm
Fuel tank capacity	23 L
Hydraulic oil tank capacity	20 L
Track gauge	850/1170 mm
Working Pressure	24 Mpa
Arm length	950 mm
Boom length	1828 mm
Steering head angle	60°(L)/70°
Flow rate	61.6 L/Min