

MCM

MCM E25 ELECTRIC FORKLIFT

TOGETHER, THE FUTURE IS BUILT



Instagram: @mcm.company



Facebook: MCM Group



Website: www.MCMGROUP.co.za

E SERIES 2.5 TON PERFORMANCE PARAMETERS

	#	Model		Unit	E25
General	1	Rated Load Capacity		kg	2500
	2	Load Center		mm	500
Dimension s	3	Lifting Height (A2)		mm	3000
	4	Free Lifting Height (A4)		mm	115
	5	Fork Size (B1)		LxWxT	1070X122X40
	6	Mast Tilting Angle		F/R	6/12
	7	Length(without fork) (B4)		mm	2380
	8	Overall Width (C1)		mm	1265
	9	Mast Height Atre Rest (A3)		mm	2000
	10	Lift Height (A1)		mm	4000
	11	Overhead Guard Height (A5)		mm	2150
	12	Turning Radius (C2)		mm	2090
	13	Front Overhang (B2)		mm	450
	14	Min.Right Angle Channel Width		mm	2380
	15	Wheelbase (B3)		mm	1520
	16	Track	Front	mm	1058
	17		Rear	mm	950
	18	Ground Clearance	Mast	mm	115
	19		Car Center	mm	170
Perform- ance	20	Travel	Full Load	km/h	13
	21		No Load	km/h	14
	22	Speed	Full Load	mm/s	310
	23		No Load	mm/s	440
	24	Lowering	Full Load	mm/s	490
	25		No Load	mm/s	410
	26	Max.Drawbar Pull	Full/No Load	kg	1700/1600
	27	Max.Gradeability	Full/No Load	%	14/15
Tire	28	Front Tire			230x9-10
	29	Rear Tire			18x7-8
Weight	30	Total Weight		kg	4200
Power & Transmission	31	Battery	Voltage/Capacity	V/AH	48/600
	32	Controller	Model&Manufacturer		AC/ZAPI
	33	Driving	Model&Manufacturer		AC/ZAPI
	34	Driving Motor	Power 52-60min	Kw	9
	35	Lifting Motor	Power 15min	Kw	11
	36	Work Pressure		Mpa	14.5

E25 MODEL E SERIES 2.5 TON PERFORMANCE PARAMETERS



- High strength drive axle.
- Reliable steering axle.
- Hydrostatic steering.
- 48V / 500 Ah Lithium-ion (ZAPI)
- Front steering lights.
- Buzzer for back off.
- High strength undercarriage frame.
- Optional attachments available.

2.5t 2 STAGE MAST

Mast Height	Carrying Capacity (Load center is 500mm)(Kg)	Mast Height After Mast Fall	Free Lifting Height (mm)	Full Mast Height (mm)	Mast Tilting Angle (F/R)	Total Weight (kg)
2000	2500	1500	115	3000	6-12°	4120
2500	2500	1750	115	3500	6-12°	4160
3000	2500	2000	115	4000	6-12°	4200
3300	2500	2150	115	4300	6-12°	4225
3500	2500	2250	115	4500	6-12°	4245
3700	2500	2350	115	4700	6-12°	4260
4000	2500	2560	115	5000	6-6°	4325
4250	2250	2675	115	5250	6-6°	4345
4500	2150	2800	115	5500	6-6°	4360
5000	1600*2000	3050	115	6000	3-6°	4395
5500	1500*1700	3350	115	6500	3-6°	4465
6000	950*1500	3600	115	7000	3-6°	4500

Note: (1)* indicates the rated load capacity of double times on the front wheel
(2) The self-weight in the table is the weight of double tires: +110kg

DIMENSIONS & DIAGRAMS

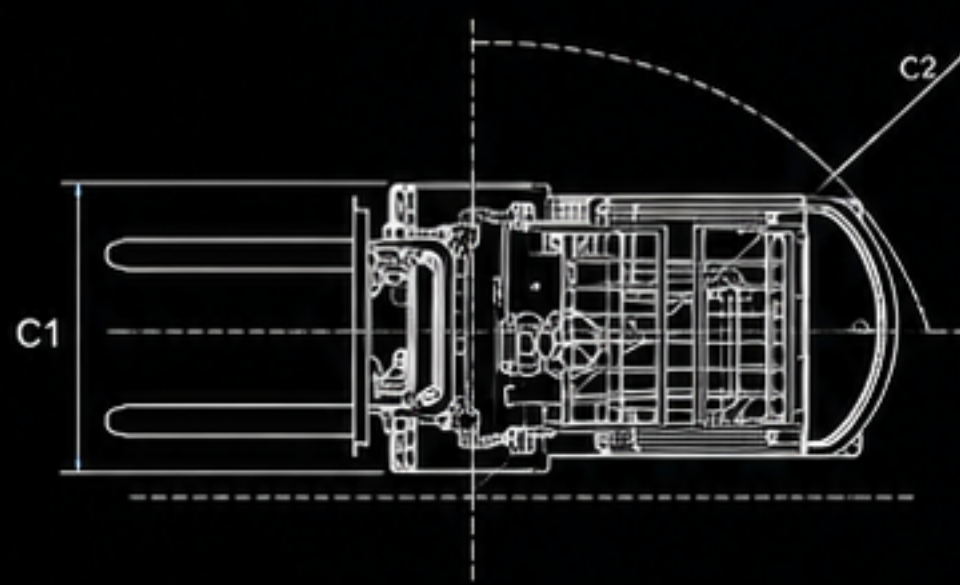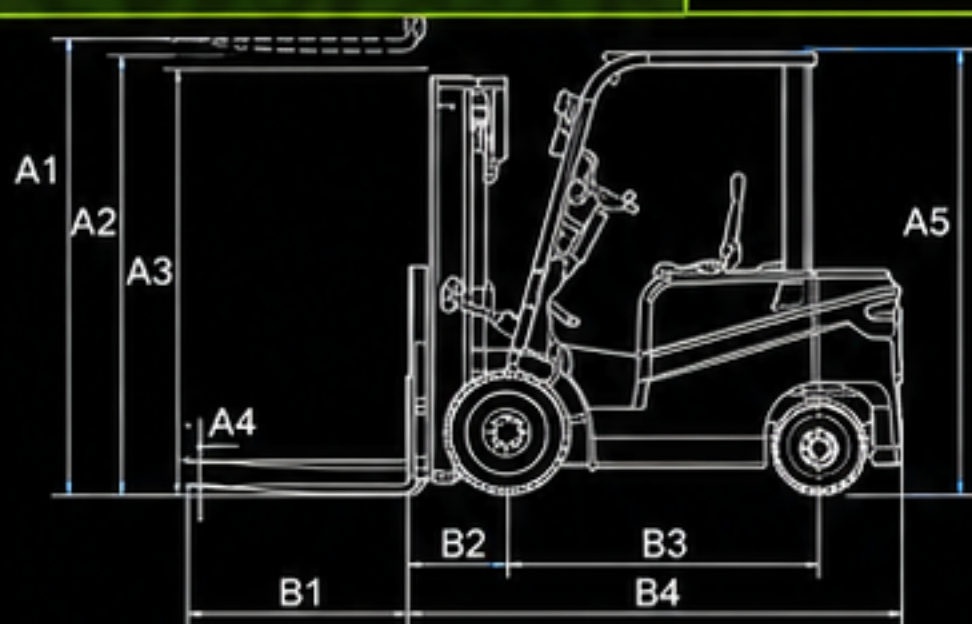

- A1 Lift Height
- A2 Lifting Height
- A3 Mast Height Atre Rest
- A4 Free Lifting Height
- A5 Overhead Guard Height
- B1 Fork Size
- B2 Front Overhang
- B3 Wheelbase
- B4 Length (without fork)
- C1 Overall Width
- C2 Turning Radius

CAPE TOWN

9 Karee Rd, Kraaifontein Industria, Cape Town, 7570

SALES (+27) 21 001 8686

ruan@mcmco.co.za

GEORGE

Jura Lands, Beach Road, Hansmoeskraal, George, 6529

SALES (+27) 44 878 2917

chris@mcmco.co.za

FREE STATE

Bloem Showgrounds, Curie Avenue, Generaal De Wet, Bloemfontein, 9301

SALES (+27) 84 022 7300

clarence@mcmco.co.za

GAUTENG

26 Sterling Rd, Unit 1, Samrand Business Park, Midrand, 0117

SALES (+27) 12 030 3451

sales@mcmco.co.za