

MCM[®]

MCM 37X-S TLB

SPEC SHEET

**POWER. PRECISION.
PERFORMANCE. EVERY TIME.**



**POWERFUL
PERFORMANCE**



**BUILT TO LAST
RELIABLE BY DESIGN**



TECHNICAL SPECIFICATIONS

MCM 37X-S TLB

POWER. PRECISION. PERFORMANCE. EVERY TIME.



ENGINE


Machine	37X-S
Model	Xinchai A499BT1
Type	Direct Injection, Water Cooled
No. of Cylinders	4
Net Peak Power	36.8kW (49.3HP) @ 2400 rpm
Fuel Tank Capacity	85L
Vehicle Speeds	18-28km/h

HYDRAULIC SYSTEM

Circuit Type	Open Centre, gear type
Pump Capacity (@ 1,900rpm)	85.5 L/min
System Pressure	18Mpa
Tank Capacity	80L
Steering Type	4WD
Power Steering	Full Shuttle-Shift

OPERATION DIMENSIONS

A Total Travel Length	6000mm
B Total Travel Height	2800mm
C Total Travel Width	1850mm
D Stabilizers Extended Width	3350mm
E Wheel Base	2050mm
F Front Axle to Bucket Edge	2250mm
G Backhoe Reach from Rear Axle	5950mm

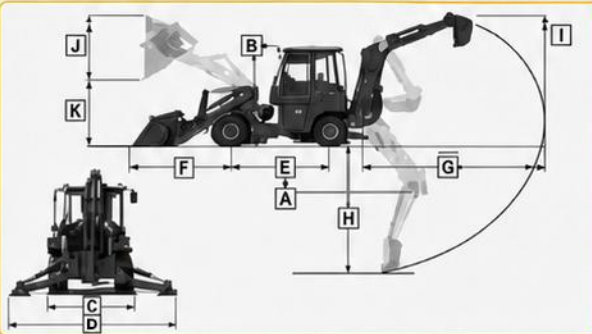

OPERATION PARAMETERS

Operating Weight	5000kg
Backhoe Parameters	
Backhoe Bucket Capacity	0.2m ³
H Max. Digging Depth	3400mm
I Max. Working Height	5000mm
Max. Digging Radius	4600mm
Rotation Angle of Boom	180°
Loader Parameters	
Loader Bucket Capacity	0.8m ³
Rated Loading Weight	1600kg
J Max. Lift Height	3700mm
K Max. Dumping Height	2650mm
Dumping Distance	1000mm
Min. Turning Distance	4800mm
Bucket Breakout Force	52kN

CAPE TOWN

9 Karee Rd, Kraaifontein Industria, Cape Town, 7570

SALES

(+27) 21 001 8686

ruan@mcmco.co.za

GEORGE

Jura Lands, Beach Road, Hammersstraat, George, 6529

SALES

(+27) 44 878 2917

chris@mcmco.co.za

FREE STATE

Bloem Showgrounds, Curie Avenue, Generaal De Wet, Bloemfontein, 9301

SALES

(+27) 84 022 7300

clarence@mcmco.co.za

GAUTENG

26 Sterling Rd, Unit 1, Samrand Business Park, Midrand, 0117

SALES

(+27) 12 030 3451

sales@mcmco.co.za