

ER3500



Telescopic Wheel Loader

-  Operating Weight **8800kg**
-  Rated Power **92kW**
-  Max. lifting Height **4620mm**
-  Overall Dimension (L*H*W) **7535*3096*2150mm**



Tel: +27(0)21 380 2580

Website: www.everun.co.za

Address: 2 Alkin Park, 4 Montreal Drive,
Airport Industria,
Cape Town, 7490

Tel: +27(0)82 058 4434

Facebook: @Sales.Everun

Email: sales@everun.co.z

Instagram: [everun.africa](https://www.instagram.com/everun.africa)

ER3500 | Telescopic Wheel Loader



Everun articulated oscillating floating joint



Sturdy telescopic arm



Two stronger lift cylinder



Easy-to-open engine hood



Comfortable cabin and good visibility



Ergonomic joystick



High quality build



Quick and easy tool change




Good view of the freight



Easily accessible lubrication points



High shear forces from planetary axle

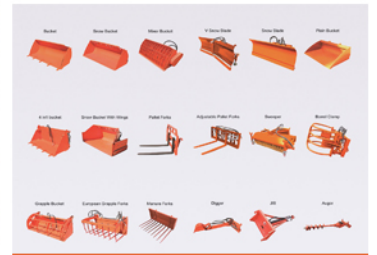

Large selection of attachments

Specifications:

► Engine Details

Model	WEICHAI WP6G125E22
Rated Power	92kW
Rated Speed	2200 (r/min)
Engine Cooling Way	Water Cooling
Fuel Consumption Ratio	≤230g/kw.h
Engine Type	In-line Arrangement, 4 Stroke

► Standard Bucket

Bucket Capacity	1m ³
Maximum Breakout Force	55kN
Bucket Type	Heavy-duty Bolt on Teeth
Rated Load	3000kg

► Brake System

Service Brake	Air-assist hydraulic brake, disk brake
Parking Brake	Manual disc brake
Braking Type	Air Operated
Axle	Wheel Axle Reducer

► Tyre

Model	17.5-25
Front Pressure	400kPa
Rear Pressure	350kPa

► Overall Dimensions

Overall Length (Bucket on Ground)	7535mm
Overall Height	3096mm
Overall Width	2150mm

► Other

Max. Dumping Height	4620mm
Transmission System	Power shift normally engaged, straight gear
Wheel Base	2763mm
Min. Turning Radius	5513mm
Wheel tread	1670mm
Weight	8800kg
System Pressure	18Mpa
Fuel Tank Capacity	100L
Boom Lifting Time	5.6s